


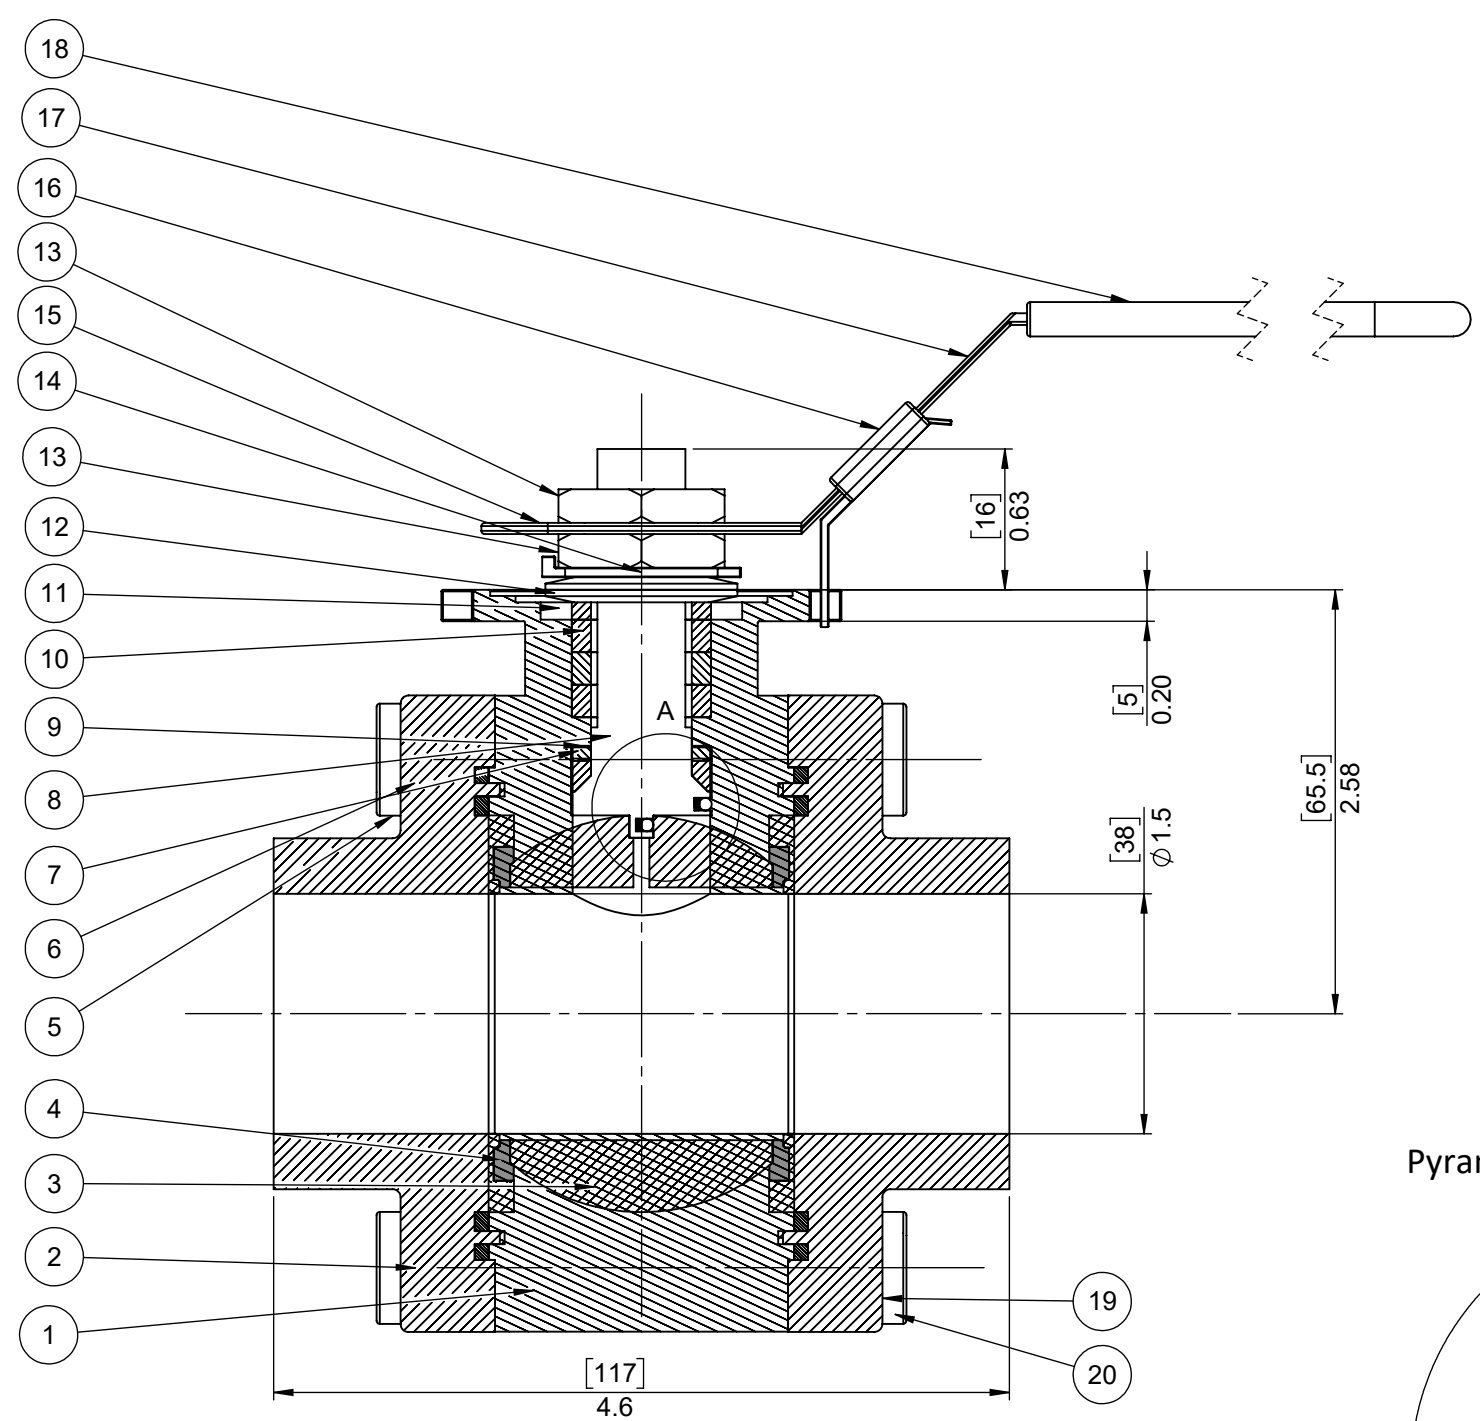
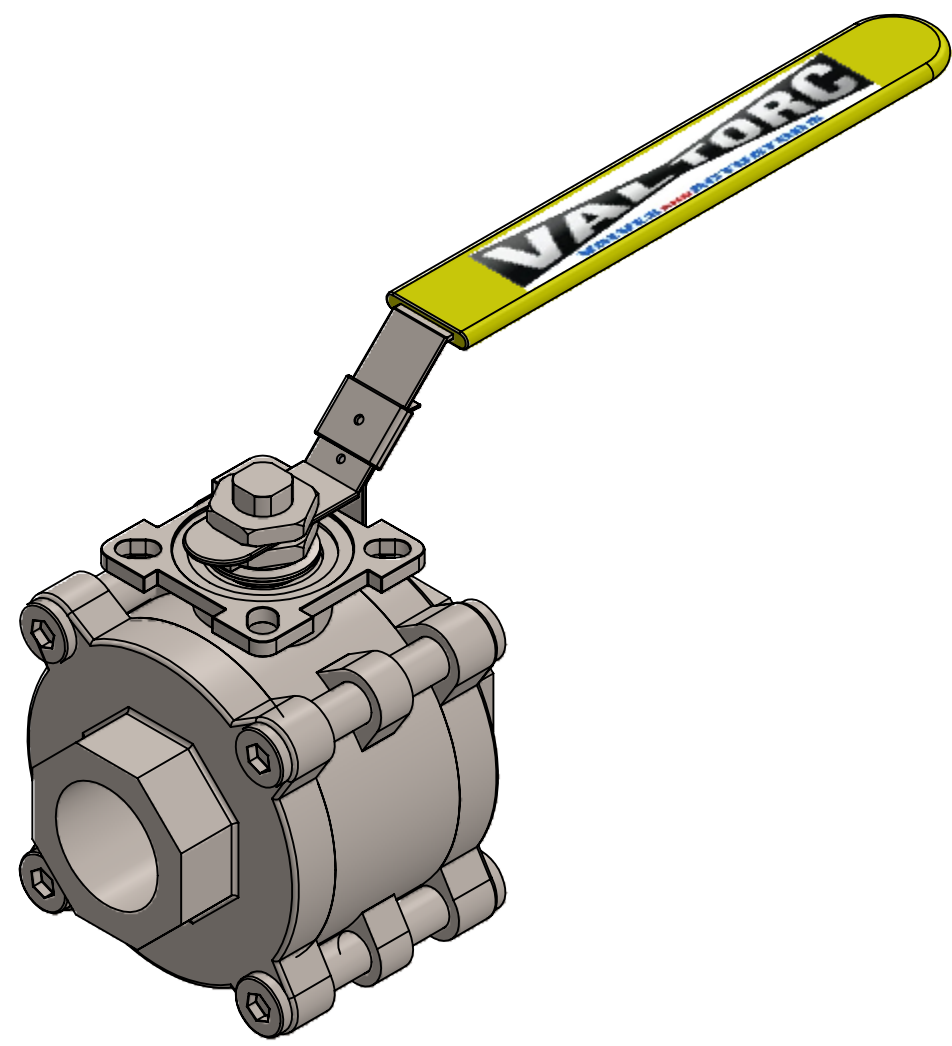


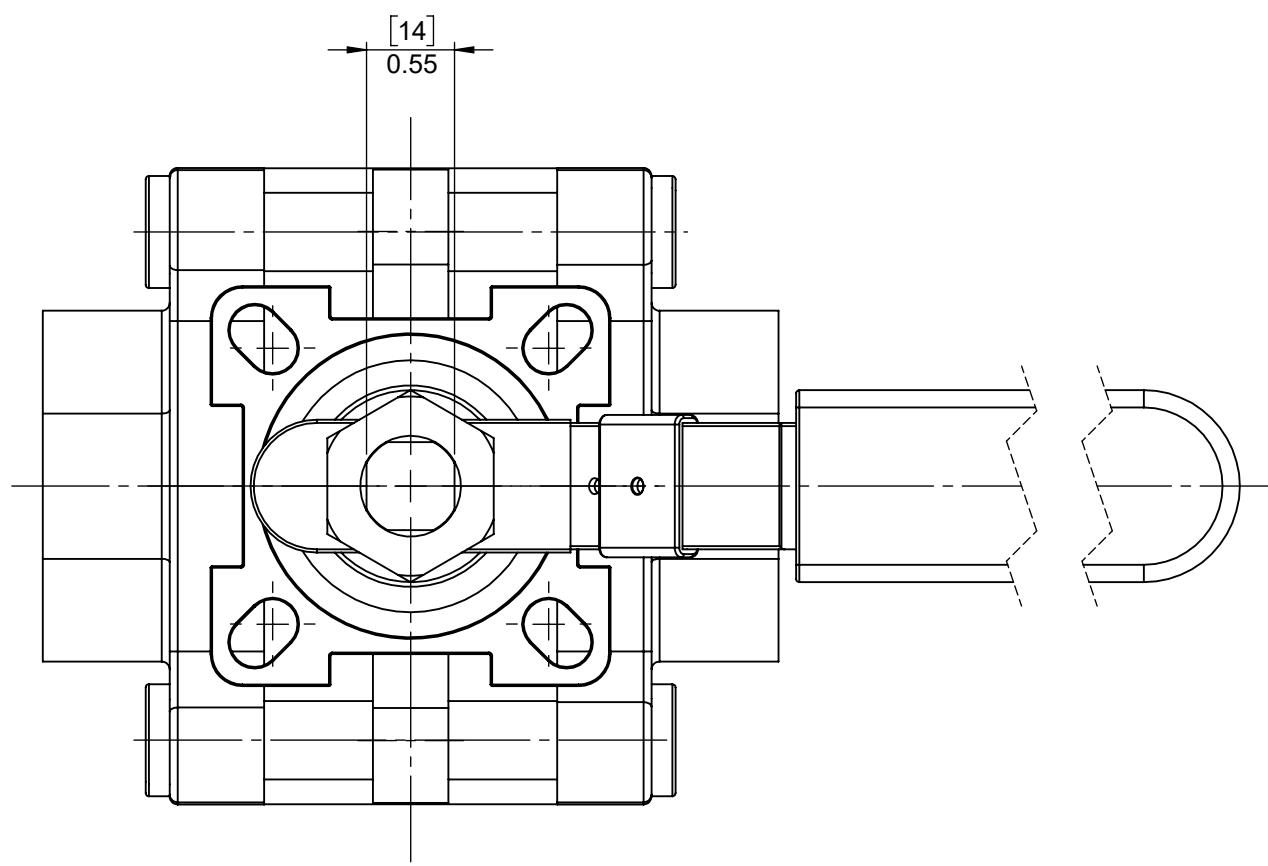

Pyramial Stem & Anti-static Device

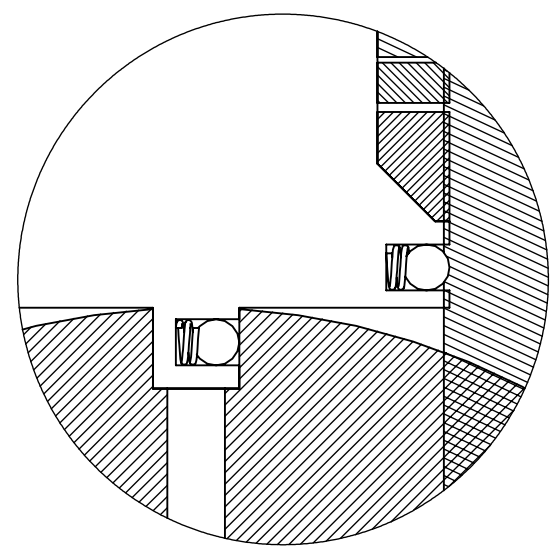


DETAIL A

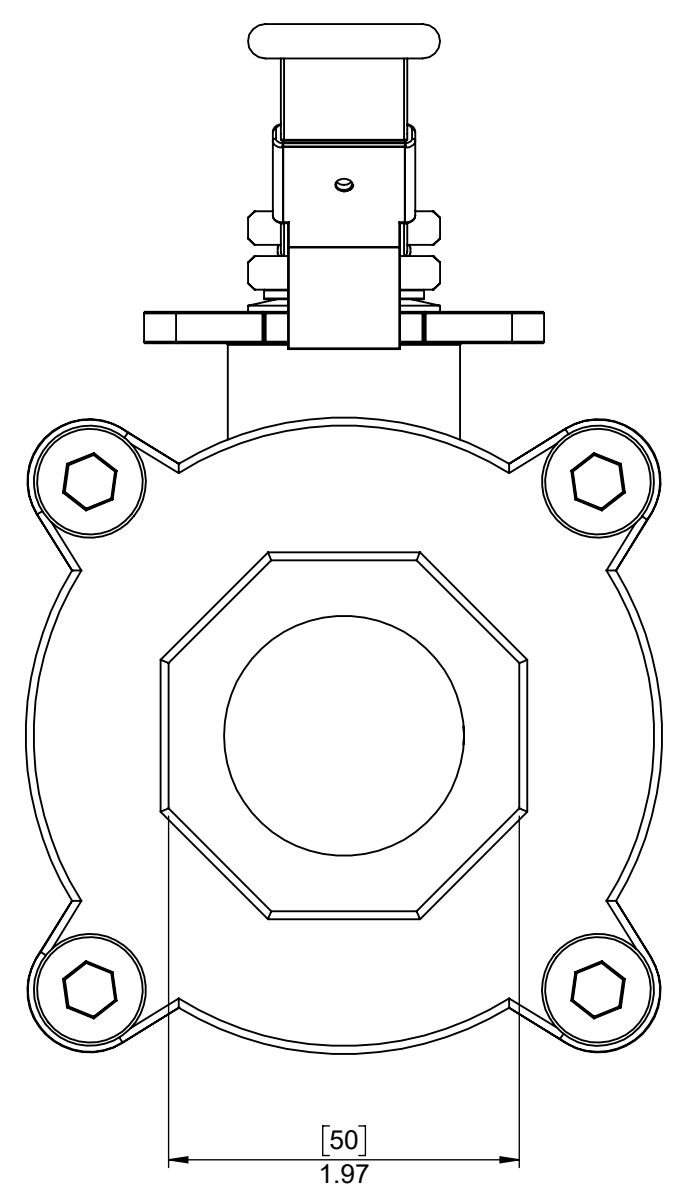

DESIGN FEATURE

1. Steam rating : 150psi WSP
2. WORKING PRESSURE: 1000 PSI
3. INVESTMENT CASTING BODY AND CAP
4. ME-PTFE SEAL KITS: REPLACES PTFE, RPTFE AND FPA
 - i. LOW DEFORMATION UNDER LOAD
 - ii. LOW PERMEATION
5. TEMPERATURE RATING: -45.5 C(-50 F) TO 246 C(475 F)
6. LONG CYCLE LIFE
7. BLOW-OUT PROOF STEM
8. ANTI-STATIC DEVICE
9. ADJUSTABLE STEM PACKING
10. HANDLE WITH LOCKING SYSTEM
11. FULL ISO-5211 PAD FOR DIRECT MOUNT AUTOMATION
12. TEST STANDARD: API 598
13. Vacuum Service to 29" Hg
14. End Connection: Butt-Weld End

PRESSURE TEMPERATURE RATINGS

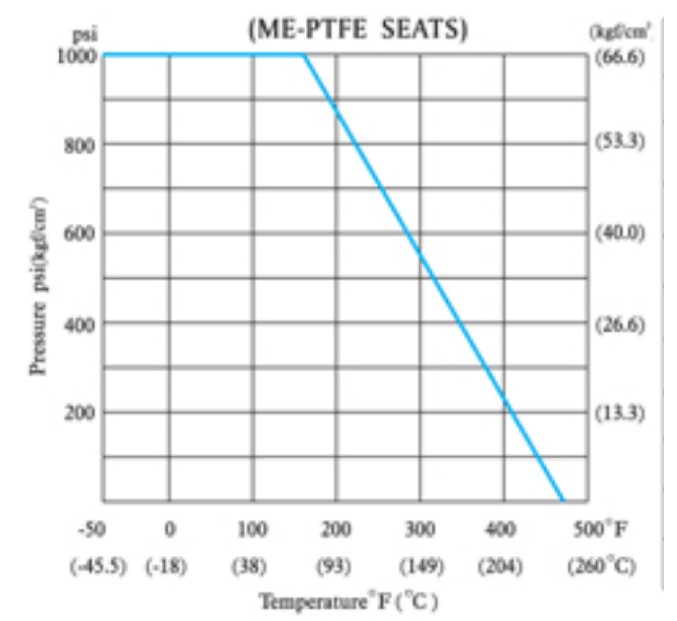

NO	Name	Material	QTY
1	Body	ASTM A315 Gr.CF8	1
2	Cap	ASTM A315 Gr.CF8	2
3	Ball	ASTM A315 Gr.CF8	1
4	Seat	ME-PTFE	2
5	Bolt	ASTM A193 Gr.B8	4-6
6	Gasket	ME-PTFE	2
7	Thrust Washer	ME-PTFE	1
8	Stem	ASTM A276 Gr.316	1
9	O-Ring	VITON	1
10	Packing	ME-PTFE	1
11	Ring	SS304	1
12	Belleville Washer	SS310	2
13	Handle Nut	SS301	2
14	Locking Washer	SS304	1
15	Stopper	SS304	1
16	Locking plate	SS304	1
17	Handle	SS304	1
18	Handle Sleeve	VINYL GRIP	1
19	Bolt Washer	SS304	4-6
20	Bolt Nut	ASTM A194 Gr.B8	4-6

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN [MM] INCHES		DRAWN	
TOLERANCES:		CHECKED	
FRACTIONAL: ±		ENG APPR.	
ANGULAR: MACH: ± BEND: ±		MFG APPR.	
TWO PLACE DECIMAL: ±		Q.A.	
THREE PLACE DECIMAL: ±		COMMENTS:	
INTERPRET GEOMETRIC TOLERANCING PER:			
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

TITLE:		
FULL BORE BALL VALVE		
SIZE	DWG. NO.	REV
C	L-40	
SCALE: 1:5		WEIGHT:
		SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VALTORC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VALTORC IS PROHIBITED.