

4



3

2

1

D


D

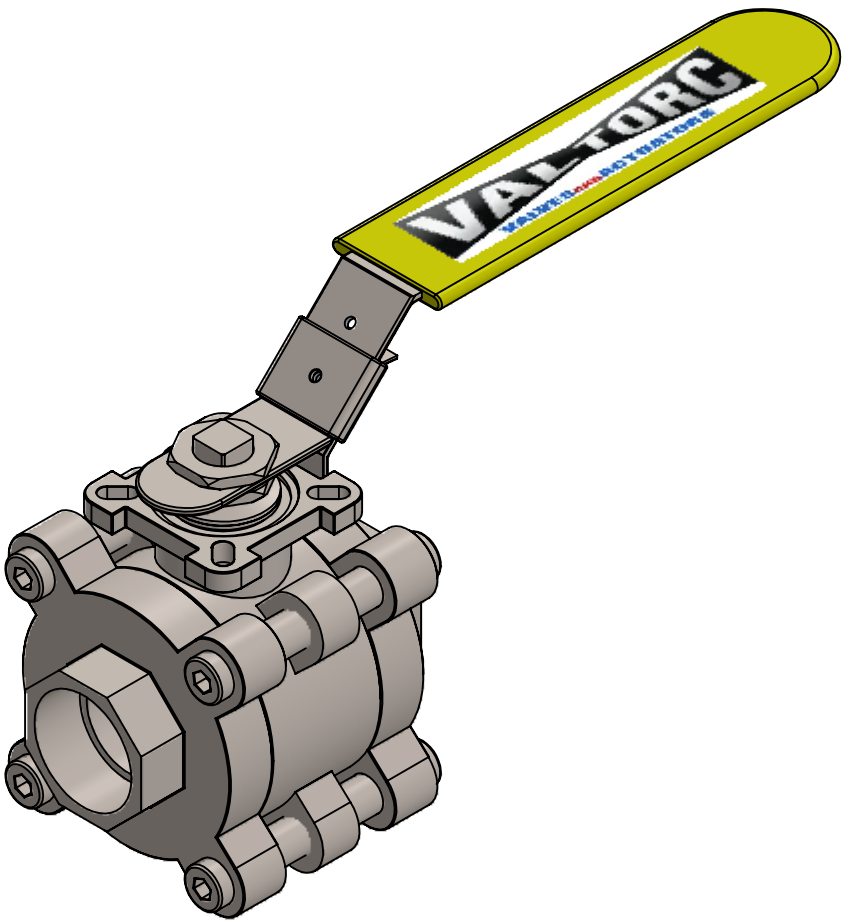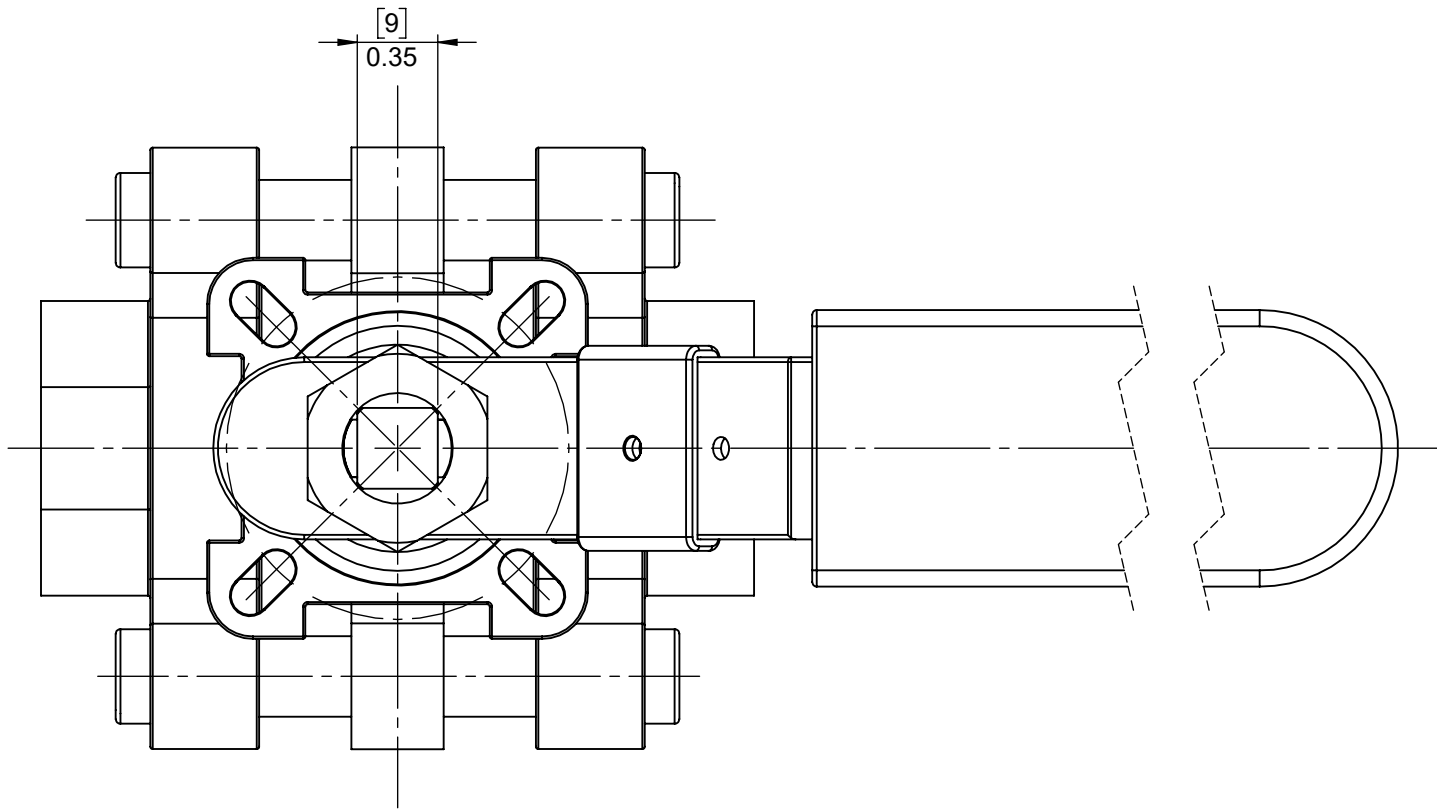

DESIGN FEATURE



- 1. Steam rating : 150psi WSP
- 2. WORKING PRESSURE: 1000 PSI
- 3. INVESTMENT CASTING BODY AND CAP
- 4. ME-PTFE SEAL KITS: REPLACES PTFE,RPTFE AND FPA
 - i. LOW DEFORMATION UNDER LOAD
 - ii. LOW PERMEATION
- 5. TEMPERATURE RATING: -45.5 C(-50 F) TO 246 C(475 F)
- 6. LONG CYCLE LIFE
- 7. BLOW-OUT PROOF STEM
- 8. ANTI-STATIC DEVICE
- 9. ADJUSTABLE STEM PACKING
- 10. HANDLE WITH LOCKING SYSTEM
- 11. FULL ISO-5211 PAD FOR DIRECT MOUNT AUTOMATION
- 12. TEST STANDARD: API 598
- 13. Vacuum Service to 29" Hg
- 14. End Connection: Butt-Weld End

PRESSURE TEMPERATURE RATINGS

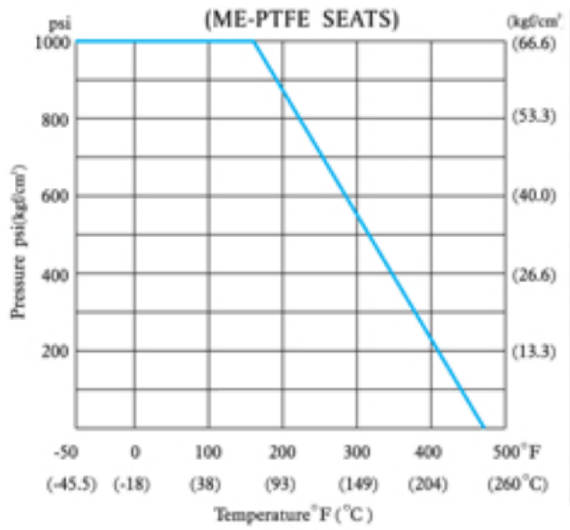

C


C

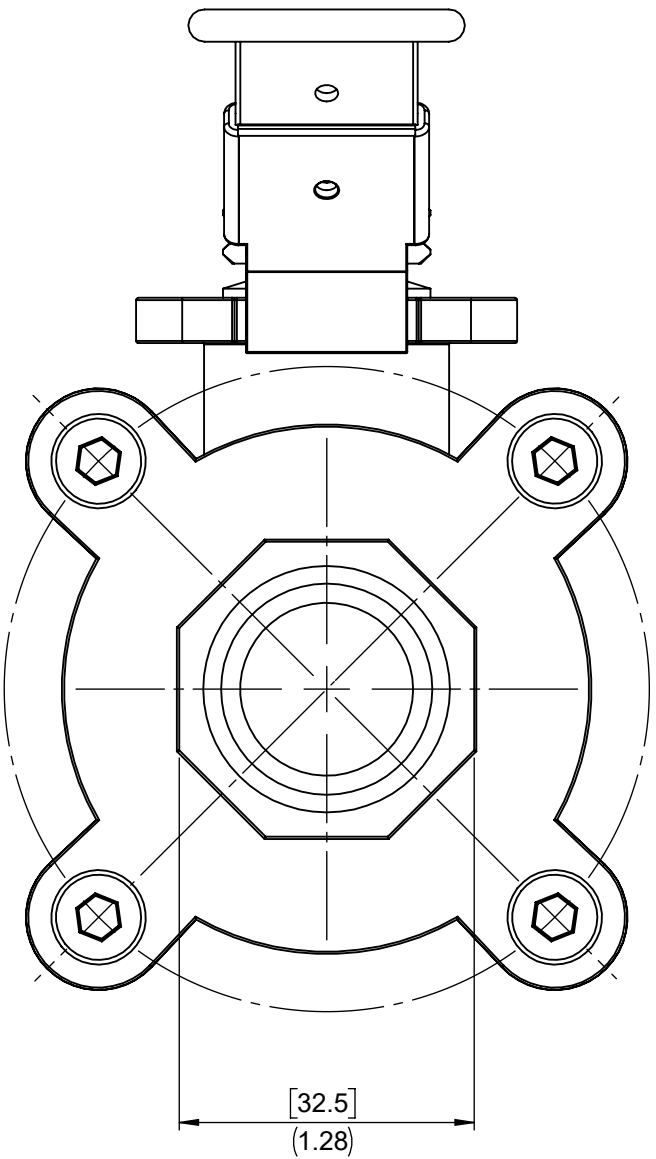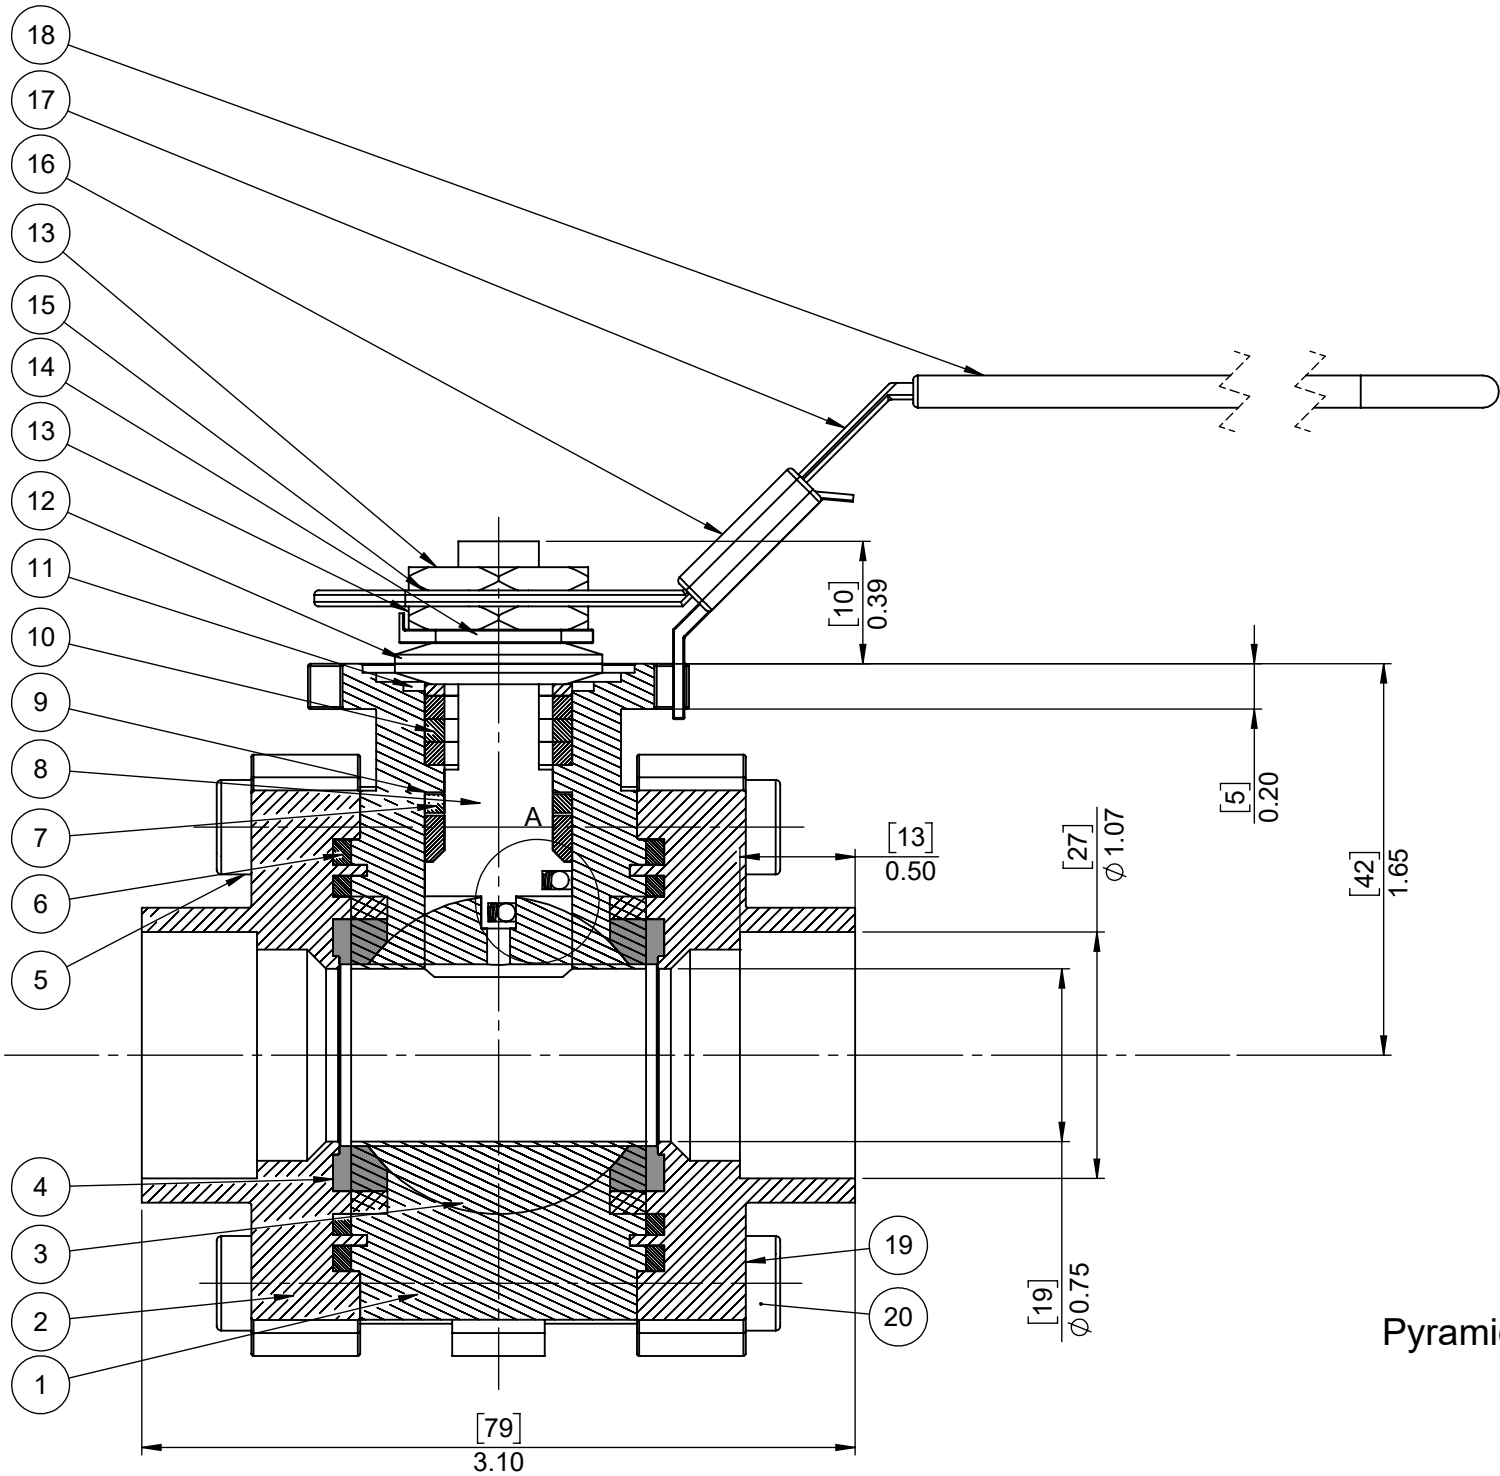

B

B

Pyramidal Stem & Anti-static device



DETAIL A

A

A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VALTORC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VALTORC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN [MM]/[INCHES]	DRAWN	
TOLERANCES:	CHECKED	
FRACTIONAL: ±	ENG APPR.	
ANGULAR: MACH ± BEND ±	MFG APPR.	
TWO PLACE DECIMAL ±	Q.A.	
THREE PLACE DECIMAL ±	COMMENTS:	
INTERPRET GEOMETRIC TOLERANCING PER:		
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

TITLE:
FULL BORE BALL VALVE

SIZE	DWG. NO.	REV
C	L-20	
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1

4

3

2

1