

4

3

2

1

D

D

C



C

B

B



A

A

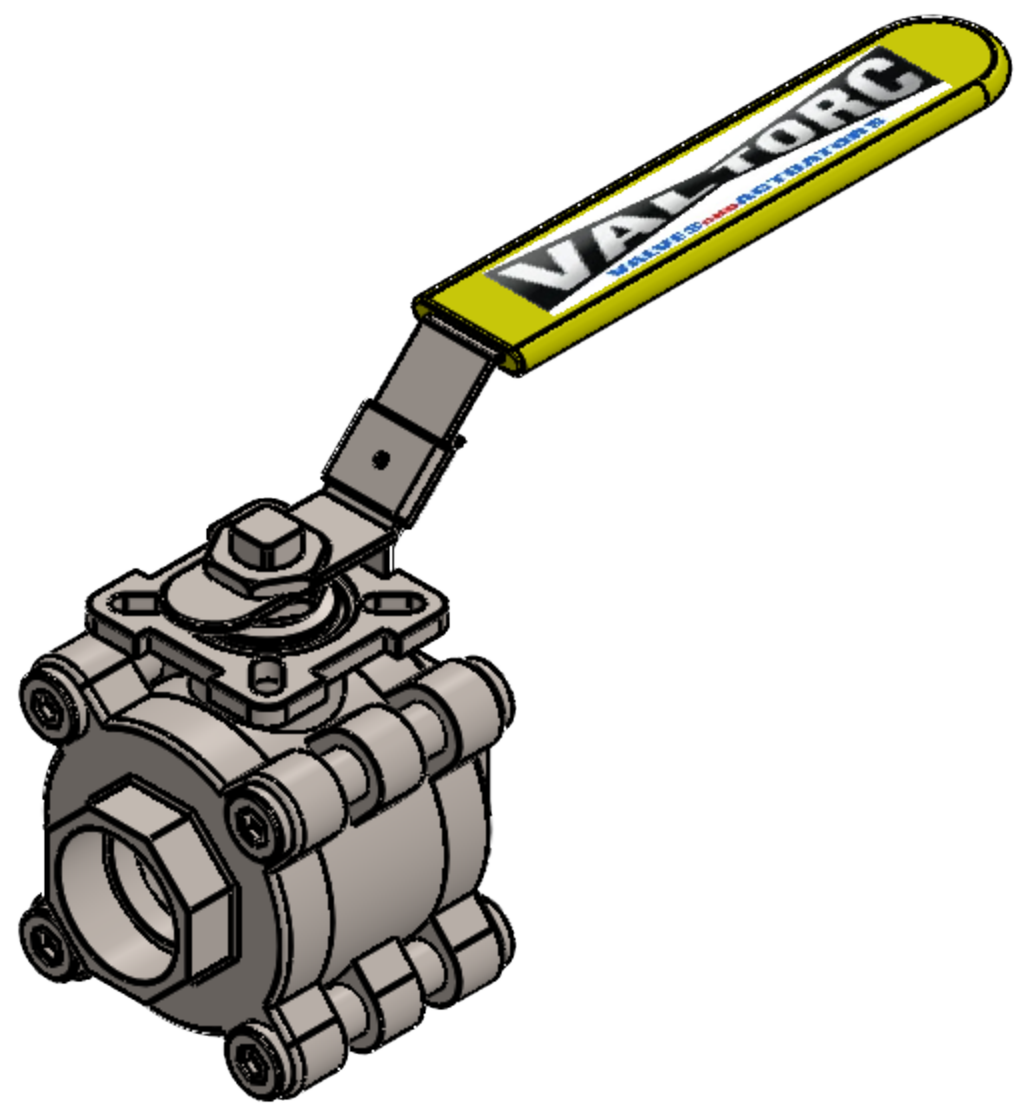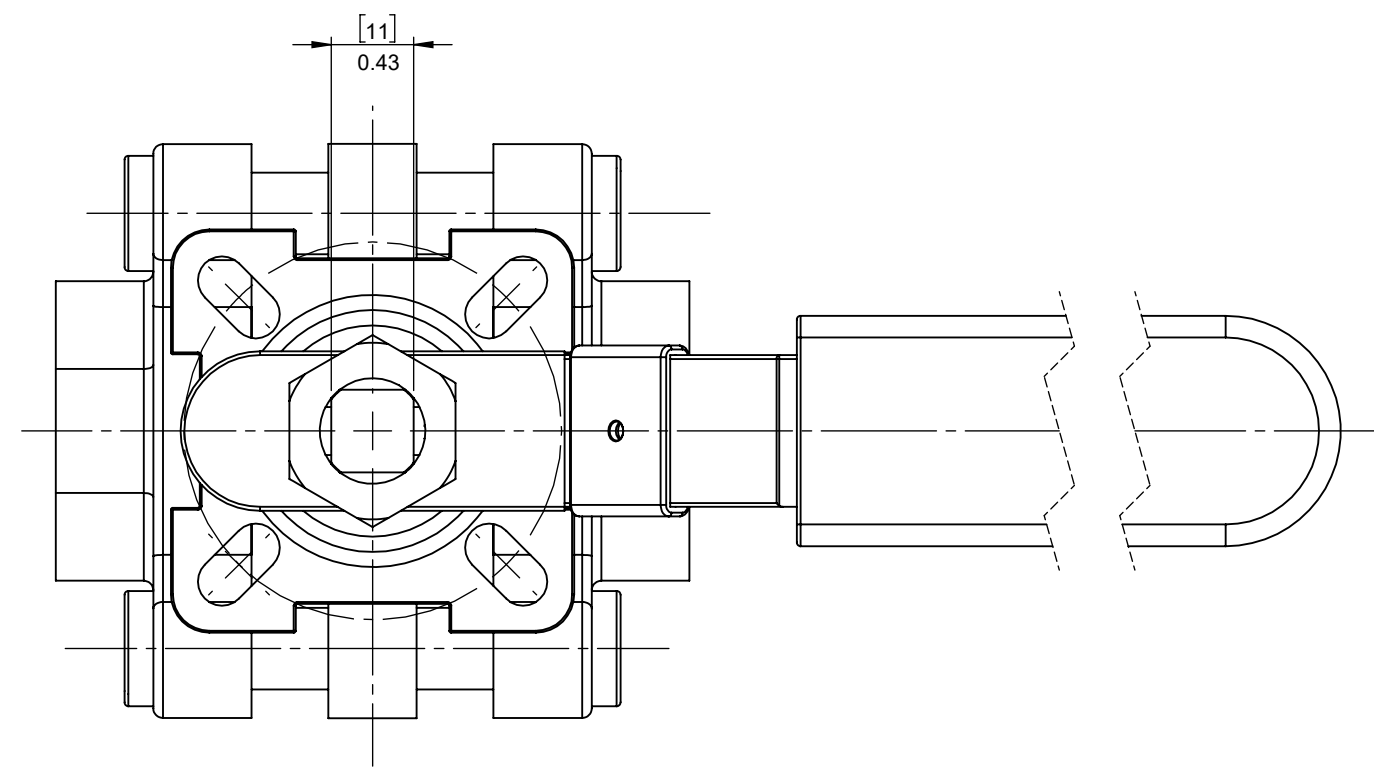


- DESIGN FEATURE
1. Steam rating : 150psi WSP
 2. WORKING PRESSURE: 1000 PSI
 3. INVESTMENT CASTING BODY AND CAP
 4. ME-PTFE SEAL KITS: REPLACES PTFE,RPTFE AND FPA
 - i. LOW DEFORMATION UNDER LOAD
 - ii. LOW PERMEATION
 5. TEMPERATURE RATING: -45.5 C(-50 F) TO 246 C(475 F)
 6. LONG CYCLE LIFE
 7. BLOW-OUT PROOF STEM
 8. ANTI-STATIC DEVICE
 9. ADJUSTABLE STEM PACKING
 10. HANDLE WITH LOCKING SYSTEM
 11. FULL ISO-5211 PAD FOR DIRECT MOUNT AUTOMATION
 12. TEST STANDARD: API 598
 13. Vacuum Service to 29" Hg
 14. End Connection: Butt-Weld End


PRESSURE TEMPERATURE RATINGS

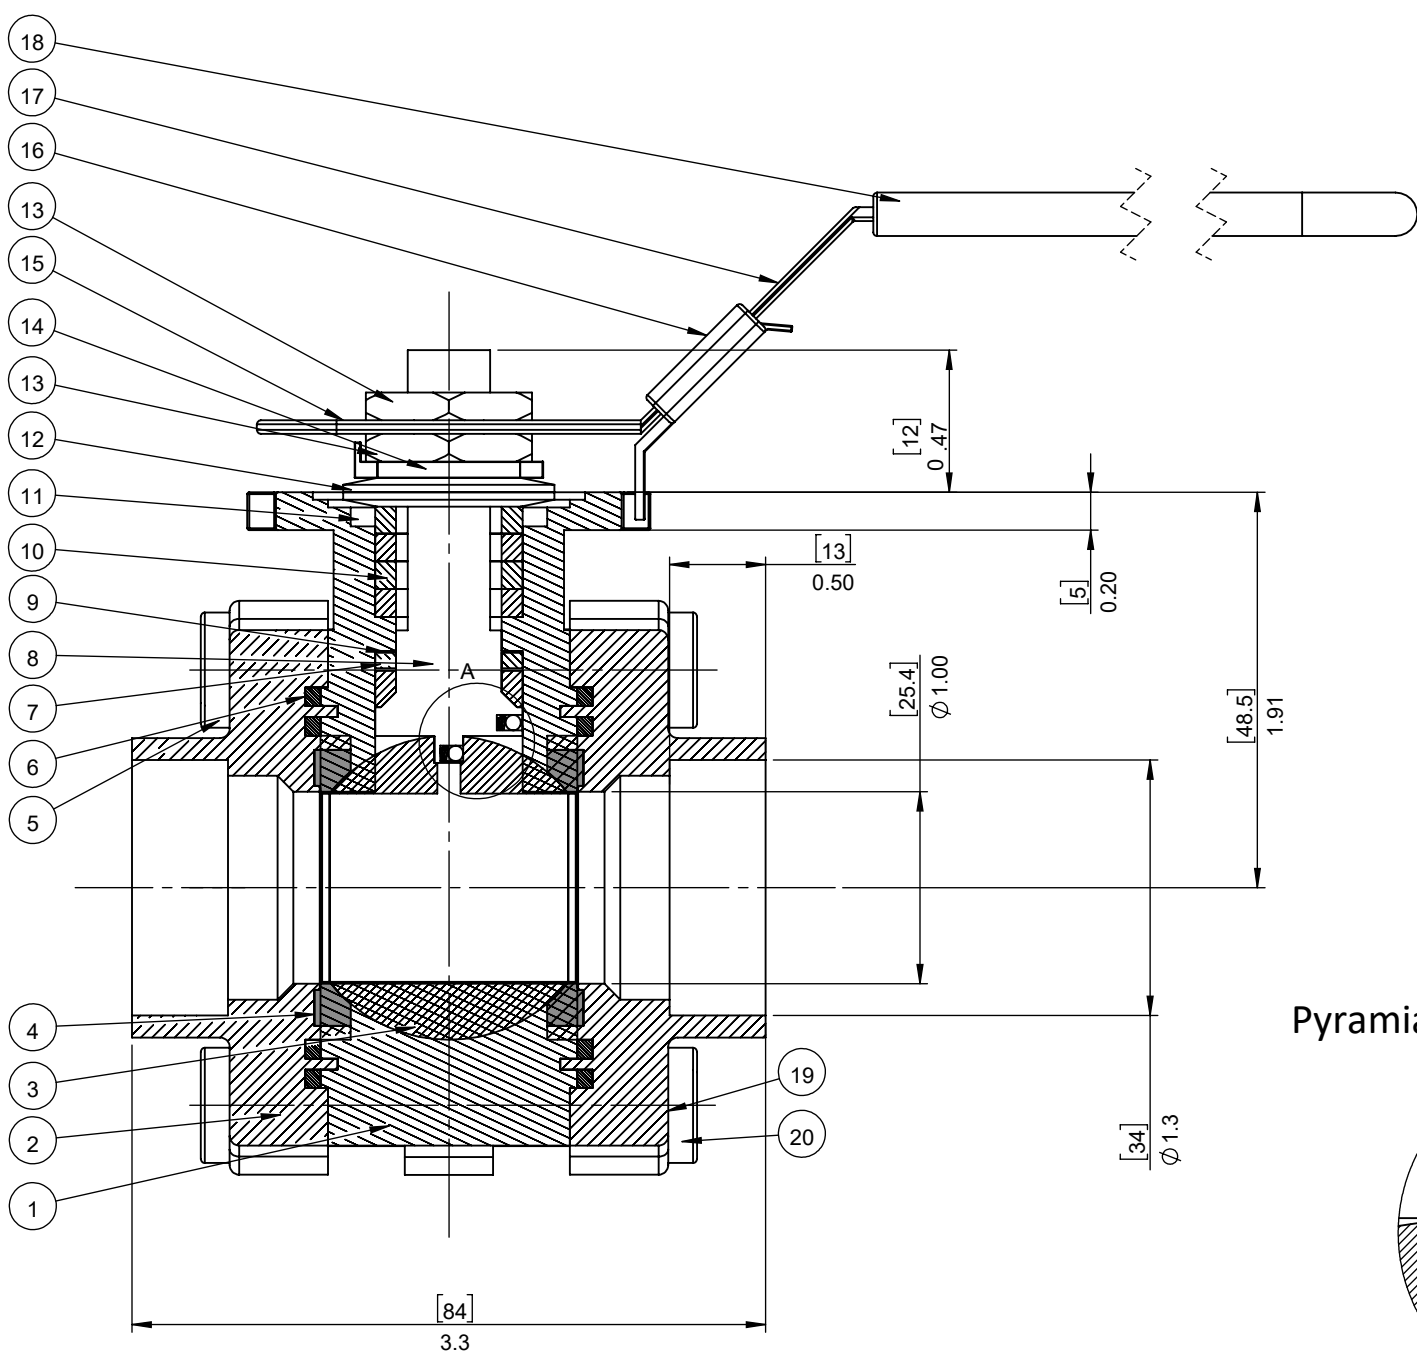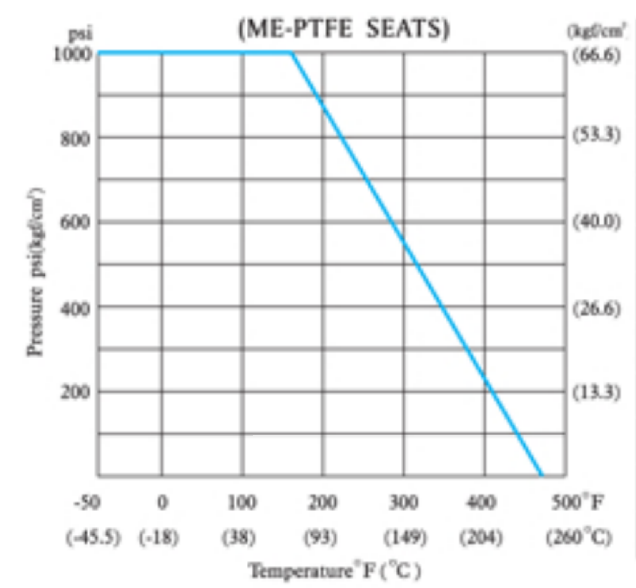

Pyramial Stem & Anti-static Device

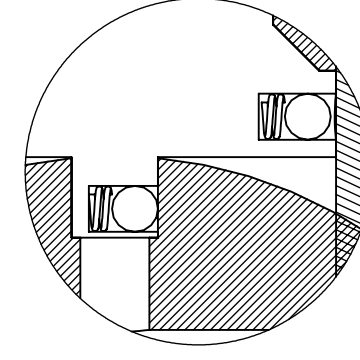

DETAIL A

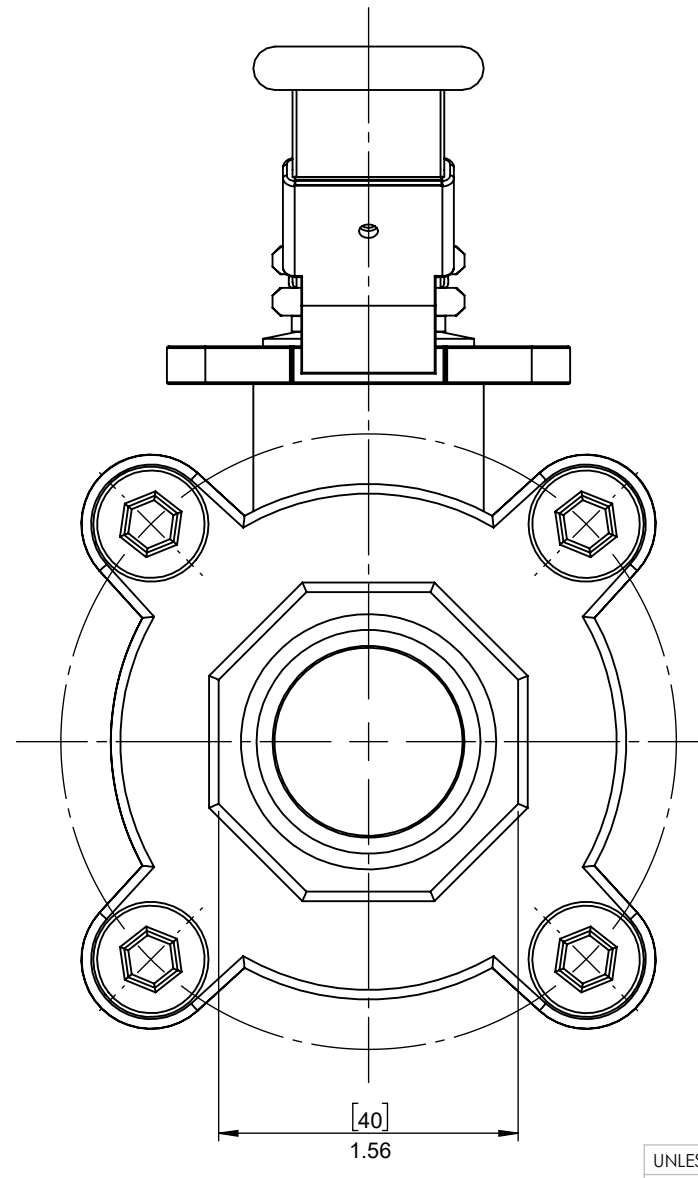

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VALTORC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF VALTORC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN [MM]INCHES		DRAWN	
TOLERANCES:		CHECKED	
FRACTIONAL ±		ENG APPR.	
ANGULAR: MACH ± BEND ±		MFG APPR.	
TWO PLACE DECIMAL ±			
THREE PLACE DECIMAL ±			
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.	
MATERIAL		COMMENTS:	
FINISH			
DO NOT SCALE DRAWING			
TITLE:			
FULL BORE BALL VALVE			
SIZE	DWG. NO.		REV
C	L-25		
SCALE: 1:5		WEIGHT:	SHEET 1 OF 1

4

3

2

1